


# Lifting Beams




## Model 21 - Twin Hoist Rotating Lifting Beams

A specially designed lifting and rotation beam which allows the use of two cranes or two hoists to horizontally rotate a load. A position locking feature allows the user the flexibility of holding the load rotation at a designated position. Available with motorized rotation.

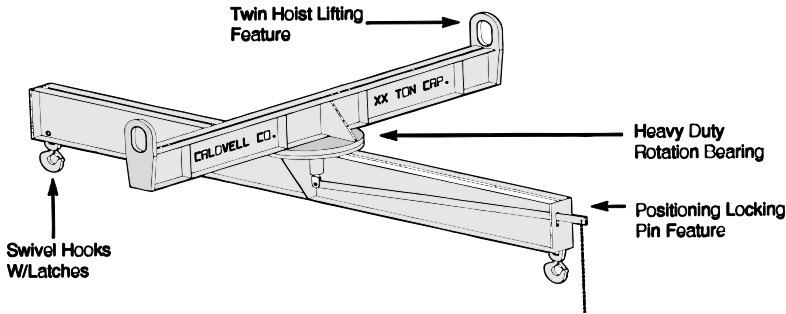

### PRODUCT FEATURES:


- Wide range of sizes & capacities available.
- Beam lengths (upper & lower) maximum 20 feet.
- Designed and manufactured to ASME B30.20.



#### OPTION A

##### TWIN HOOKS.


Used in conjunction with basket hitch slings.



#### OPTION B

##### J HOOKS.


Generally required to lift paper rolls or similar application. (Use Model 23 application information required, page A.26)



#### OPTION C

##### MOTORIZED ROTATION.

Allows remote positioning of a load.




#### OPTION D

##### LOWER HEAD ROOM BAILS.

Utilized when headroom must be held to a minimum.

## Model 28 - Chlorine Cylinder Lifting Beam

Designed to efficiently handle chlorine gas cylinders. Standard size as determined by Chlorine Institute is length of 80-3/4" to 82-1/4". Special low headroom modification is available.

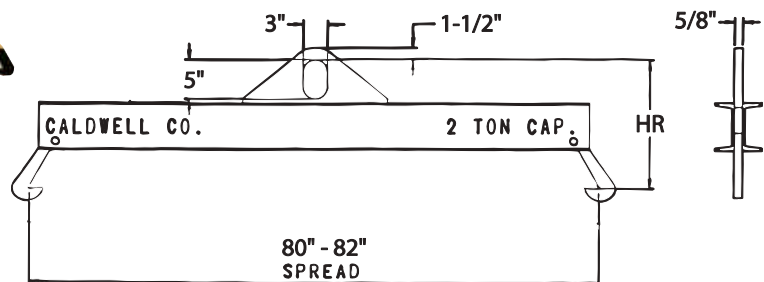

### SPECIFICATIONS

Model Number	Capacity In Tons	Headroom (HR) (in.)	Weight (lbs.)
28-2-80/82	2	13-1/2 - 10-1/2	105